



## MONSIEUR TRICOT HANGING LAMP

User manual English UK  
Version 7 - 02-2025

# TRIBÙ



# CONTENTS

---

<b>Contents</b>	<b>3</b>	<b>Product overview hanging lamps</b>	<b>11</b>
		Parts list	11
<b>Introduction</b>	<b>4</b>		
<b>The story of Monsieur Tricot</b>	<b>4</b>	<b>Specifications</b>	<b>12</b>
<b>Collection overview</b>	<b>5</b>	<b>Installation</b>	<b>13</b>
<b>Safety instructions</b>	<b>7</b>	Check the contents of the package	13
<b>Intended use</b>	<b>8</b>	Installing the lamp	13
<b>Disclaimer</b>	<b>8</b>	<b>Maintenance</b>	<b>16</b>
<b>Recycling</b>	<b>8</b>	Replacing the LED light bulb	16
<b>Compliance</b>	<b>9</b>	Cleaning the cover	18
		<b>Notes</b>	<b>22</b>

## INTRODUCTION

---

Congratulations on the purchase of your Monsieur Tricot lamp. Its warm glow and hand-crocheted or knitted fabric will cast beautiful shadows as a magical backdrop for long, cosy summer nights. The Monsieur Tricot hanging and standing lamps form a complete family of lights – you can read their story below.

This user manual contains all the necessary information for the correct, efficient and safe use of your lamp. We encourage you to read this information carefully before installing or using the product.

One lamp from the Monsieur Tricot collection has been used as an example to explain the instructions. It may be possible that your lamp looks slightly different.

## THE STORY OF MONSIEUR TRICOT

---

Designer Ilia Eckardt grew up immersed in the Belgian fashion scene, his mother Hilde Frunt knitting prototypes for Belgian fashion designers such as Raf Simons, Ann Demeulemeester and Dries Van Noten. Fascinated by their world, Ilia worked on several knitting projects of his own, experimenting with innovative knitting techniques and materials.

Monsieur Tricot is his first creation, a family of in- and outdoor lamps, knitted or hand-crocheted with an innovative, weatherproof yarn. The sphere shaped lights give a warm glow and the different patterns cast beautiful shadows. The knitting and crocheting is done in Belgium by a network of artisans and every item is checked by Ilia and his mother.

As family is very important to the designer, he created his light objects as a family. Meet the handsome Monsieur Lebonnet, the graceful Madame Latoque, the chic Madame Cachet and their nephew Monsieur Ellipse.

# COLLECTION OVERVIEW

COLOURS



10-Linen



30-Moss



60-Brick



89-Wengé

HANGING LAMPS

## Monsieur Lebonnet



dia 30 cm  
D080130H



dia 40 cm  
D080140H



dia 60 cm  
D080160H

## Madame Latoque



dia 30 cm  
D080230H



dia 40 cm  
D080240H

## Madame Cachet



dia 30 cm  
D080330H



dia 40 cm  
D080340H



dia 50 cm  
D080350H

## Monsieur Ellipse



dia 40 cm  
D080440H

STANDING LAMPS

## Monsieur Lebonnet



dia 30 cm  
D080130S



dia 40 cm  
D080140S



dia 60 cm  
D080160S

## Madame Latoque



dia 30 cm  
D080230S



dia 40 cm  
D080240S

## Madame Cachet



dia 30 cm  
D080330S



dia 40 cm  
D080340S



dia 50 cm  
D080350S

**Monsieur Lebonnet**



dia 30 cm  
D080130SW



dia 40 cm  
D080140SW



dia 60 cm  
D080160SW

**Madame Latoque**



dia 30 cm  
D080230SW



dia 40 cm  
D080240SW

**Madame Cachet**



dia 30 cm  
D080330SW



dia 40 cm  
D080340SW



dia 50 cm  
D080350SW

# SAFETY INSTRUCTIONS

---

## GENERAL

- ⚠ Only use the product as described in this manual.
- ⚠ Do not use a damaged product.
- ⚠ Do not drop the product, avoid bumping, and avoid impact with hard, pointy objects.
- ⚠ Do not use the product if a part is damaged or defective.
- ⚠ Replace a damaged or defective part immediately.
- ⚠ Do not tumble dry the removable cover.
- ⚠ Any changes made to the product can have consequences for safety, correct operation and warranty procedures.
- ⚠ Every lamp must be removed at least 2 meter horizontally and vertically from any type of heat source.
- ⚠ Do not submerge the product in water or any other liquid.
- ⚠ Do not unscrew the screws of the product and never open the product to avoid damage.
- ⚠ Always switch off the power before starting installation or maintenance work.

## INTENDED USE

---

The product is only intended as indoor or outdoor LED lighting. Any change to the product can have consequences for safety, warranty and correct operation.

## DISCLAIMER

---

Designs and specifications are subject to change without notice. All logos, brands and product names are trademarks or registered trademarks of their respective owners and are hereby recognised as such.

## RECYCLING

---

Our products are packaged in environmentally friendly materials that can be recycled, disposed of or destroyed without endangering the environment.



This symbol indicates that a product should not be thrown away with other household waste throughout the EU to prevent possible harm to the environment or human health by uncontrolled waste disposal. You are responsible for recycling in order to promote the sustainable reuse of raw materials.



## COMPLIANCE

---



Monsieur Tricot complies with Low Voltage, EMC, Ecodesign and RoHS directives.

### FCC WARNING

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device must not cause harmful interference, and (2) the user must accept any interference received, including interference that may cause undesired operation. Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation.

If this equipment does cause interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment to an outlet on a different circuit from the receiver.
- Consult the dealer or an experienced radio/TV technician for help.

To maintain compliance with the FCC's RF Exposure guidelines, this equipment should be installed and operated with minimum distance of 20cm between the source of interference (in this case Bluetooth) and your body.

## WARNING IC


This device complies with Industry Canada's licence-exempt RSSs. Operation is subject to the following two conditions:

- (1) This device must not cause interference; and
- (2) This user must accept any interference, including interference that may cause undesired operation of the device.

To maintain compliance with RF exposure guidelines, this equipment should be installed and operated with a minimum distance of 20cm between the lamp and your body.

Hanging lamps


Monsieur Tricot

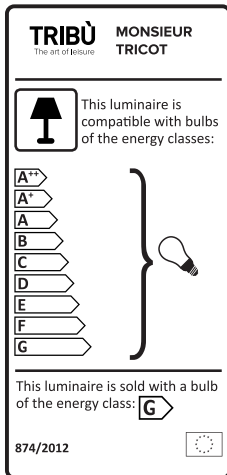

# PRODUCT OVERVIEW HANGING LAMPS

---

## PARTS LIST

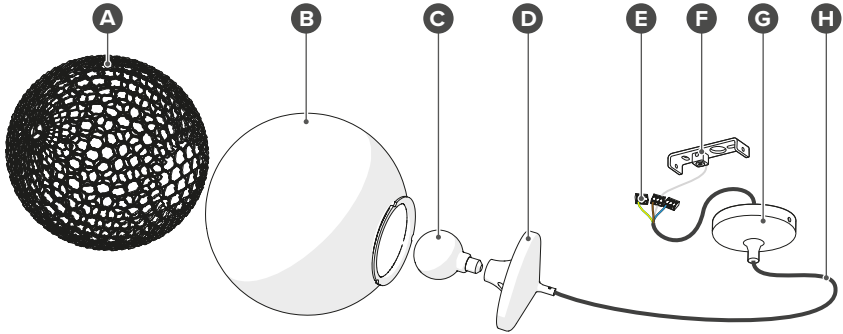

- A** Removable cover
- B** Sphere
- C** LED light (replaceable)
- D** Fitting

- E** Splicing connector
- F** Mounting bracket
- G** Ceiling canopy
- H** 4-wire cable, 5 meter

## SPECIFICATIONS

<b>Light source</b>	LED light (replaceable)
<b>Colour temperature</b>	2.200 K
<b>Fitting</b>	E27
<b>Voltage</b>	220-240V
<b>Wattage</b>	2.5W
<b>Light source lifetime</b>	30.000
<b>On/off cycles</b>	10.000
<b>Luminous flux</b>	240 lumen
<b>Colour rendering index</b>	Ra.80
<b>Energy class</b>	F
<b>Installation</b>	5 meter cable, mounting bracket, ceiling canopy and wire connector clamps included
<b>Control</b>	Have a local professional install a switch.
<b>Dimming</b>	Have a local professional select a light source that fits the installation and is equipped with a dimmer.

# INSTALLATION

---


## CHECK THE CONTENTS OF THE PACKAGE

Check if all parts from the parts list are present and that no damage is visible on the parts. If parts are missing or damaged, please contact your local Tribù dealer.


## INSTALLING THE LAMP

- ⚠ Always switch off the power before starting installation or maintenance work.
- ⚠ Installation must be done by a qualified electrician.
- ⚠ Installing the lamp requires two people.


To hang the lamp at the desired height:

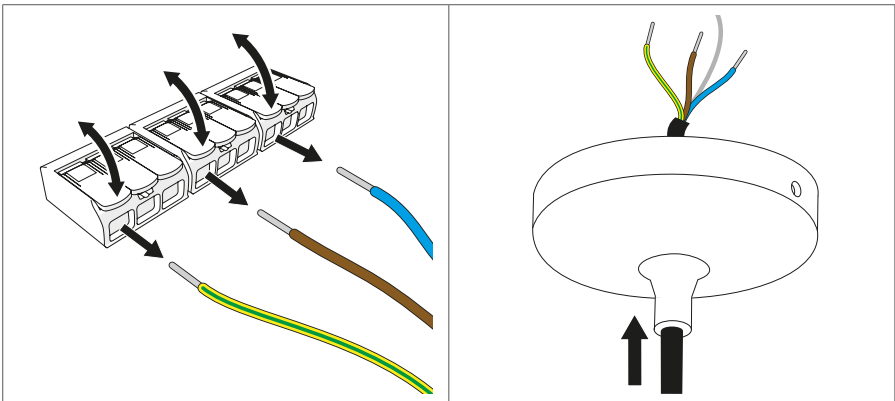


1. Remove the wires from the splicing connectors.
2. Route the cable through the canopy.

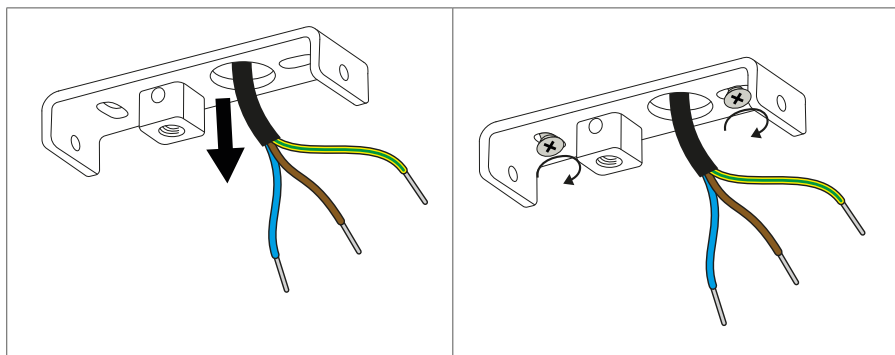


3. Guide the cables coming from the ceiling trough the designated hole in the mounting bracket.
4. Secure the mounting bracket to the ceiling with 2 screws.

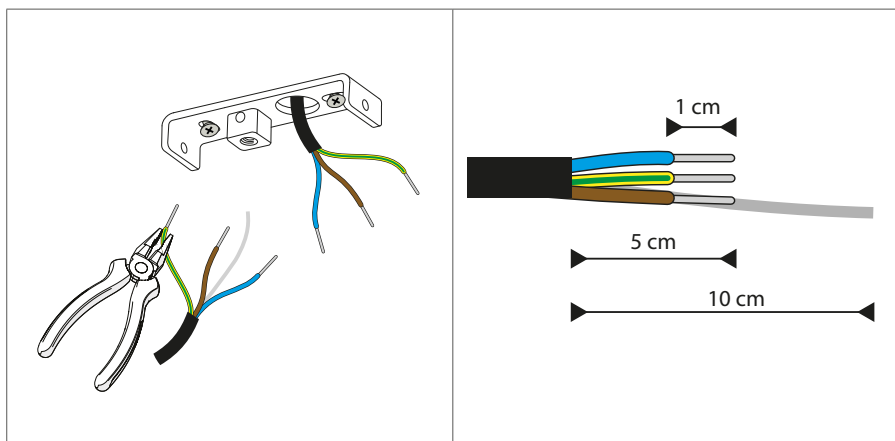


5. Cut the exposed cable to the desired length - minimum 10cm.
  6. Remove 10 cm of the black cover.
  7. Shorten the electric wires to 5 cm and strip 1 cm.
- ⚠ Do not shorten the metal wire.

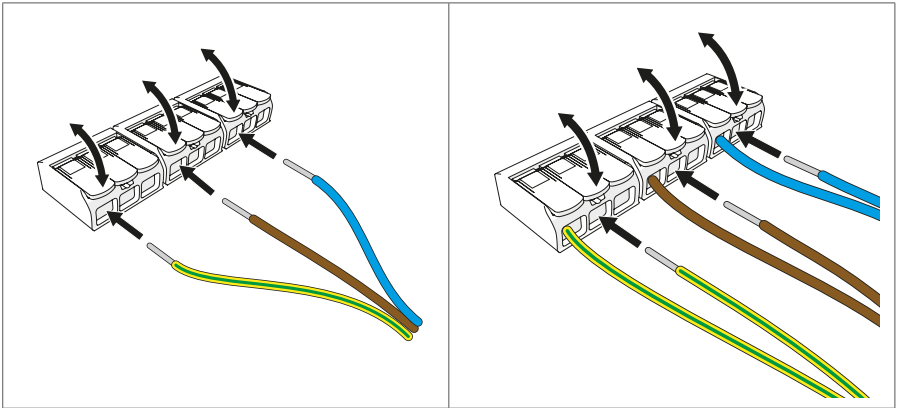

8. Insert the cables from the lamp into the splicing connectors.
9. Connect the wires coming from the ceiling and the cables from the lamp with the splicing connectors.

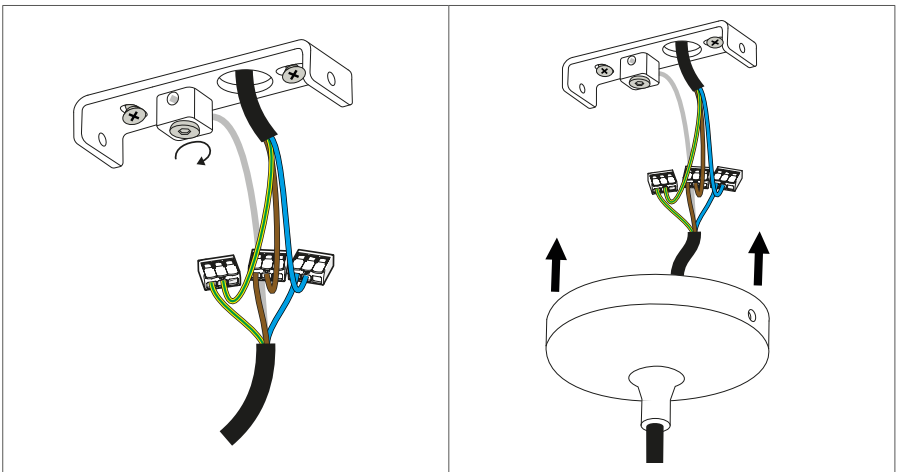

10. Secure the steel cable by inserting it in the designated hole. Secure it by tightening the screw.
11. Slide the canopy over the mounting bracket.

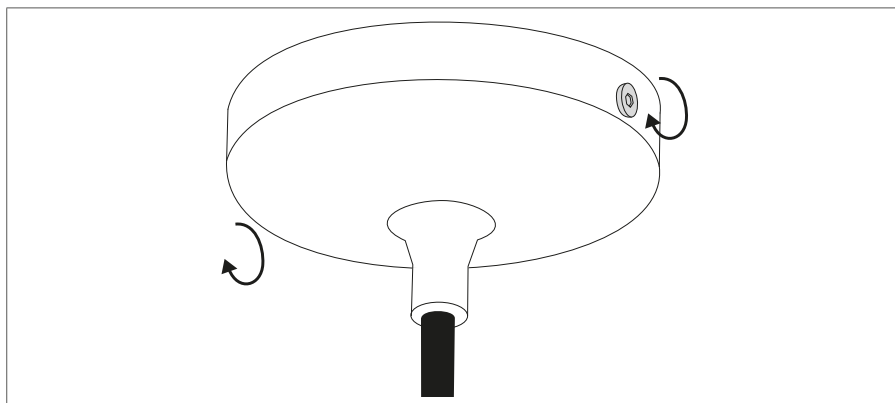


12. Secure the canopy by tightening the 2 bolts.

## MAINTENANCE


---

### REPLACING THE LED LIGHT BULB

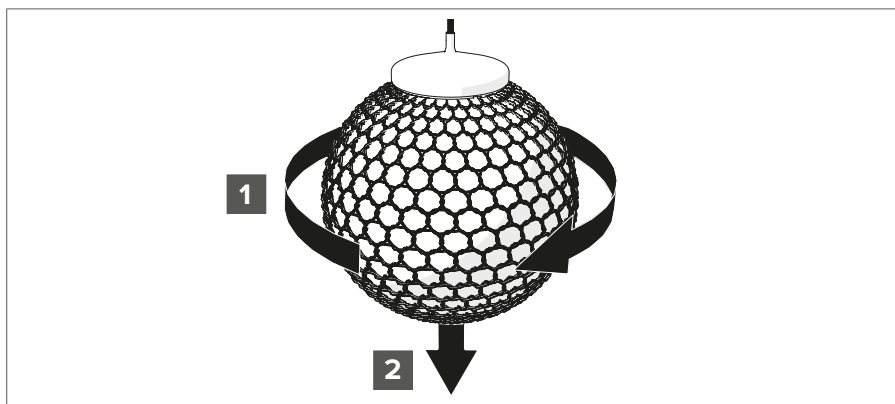


- ⚠ Always switch off the power before starting installation or maintenance work.
1. Turn the sphere clockwise until it is free of the bayonet catch.
  2. Remove the sphere.



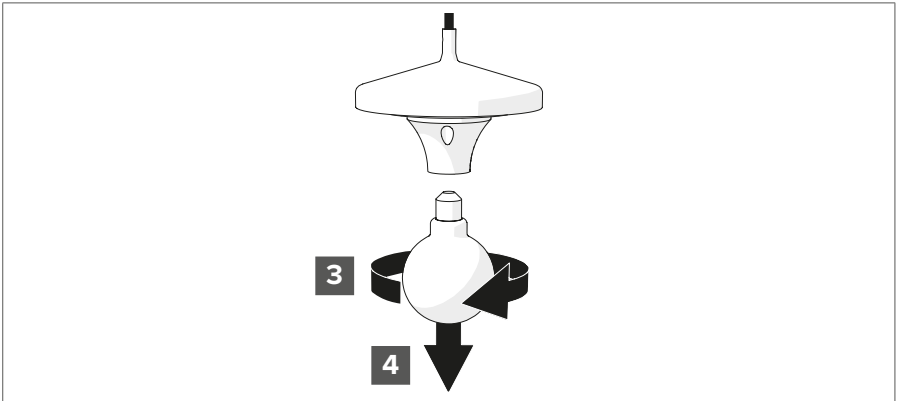


3. Turn the LED light clockwise.
4. Remove the LED light.

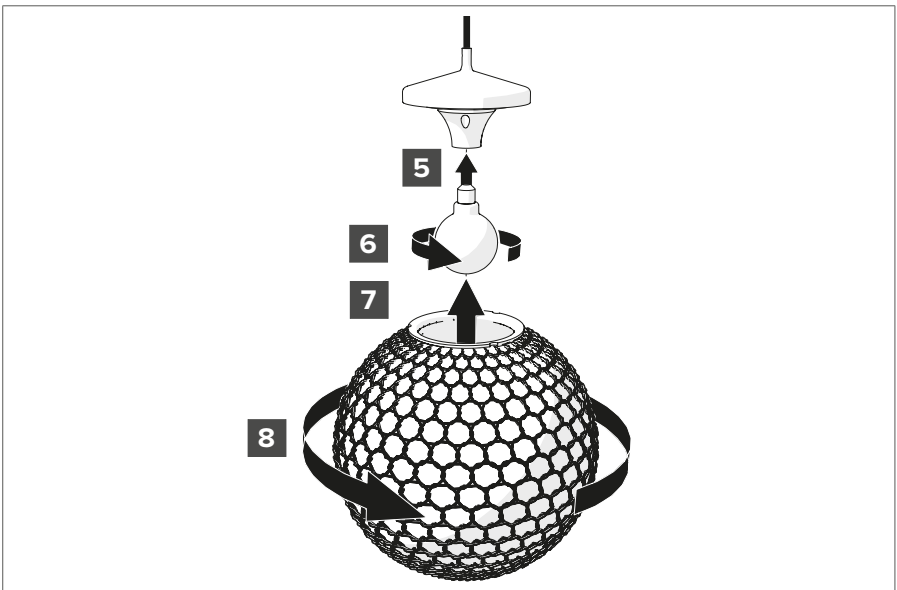


5. Place the new LED light in the socket.
6. Turn the LED light counterclockwise.
7. Place the sphere in the bayonet catch.
8. Turn the sphere counterclockwise until it is secure.
9. Switch on the power and test whether the lamp is functioning properly.

## CLEANING THE COVER

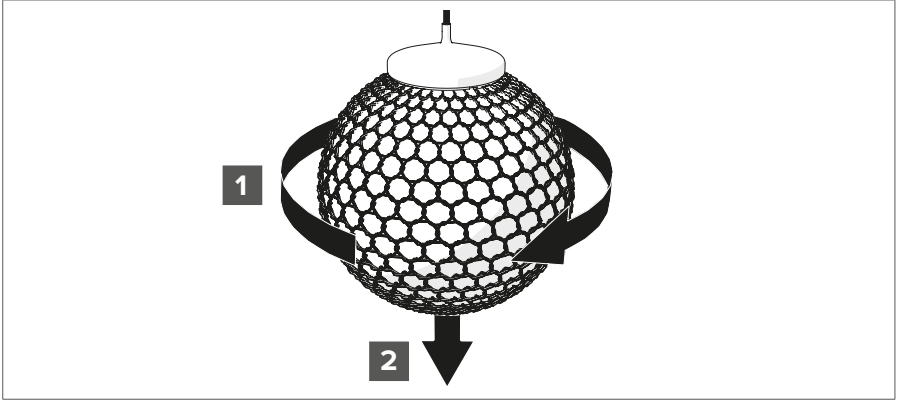


⚠ Always switch off the power before starting installation or maintenance work.


1. Turn the sphere clockwise until it is free of the bayonet catch.
2. Remove the sphere.

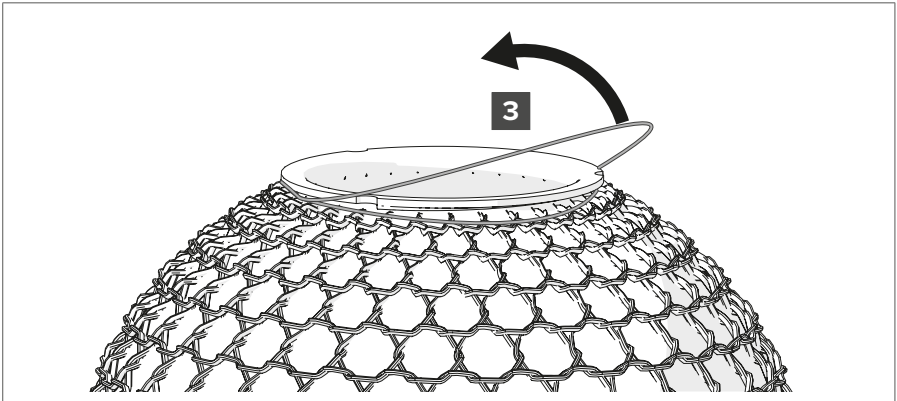


3. Loosen the elastic band of the removable cover.

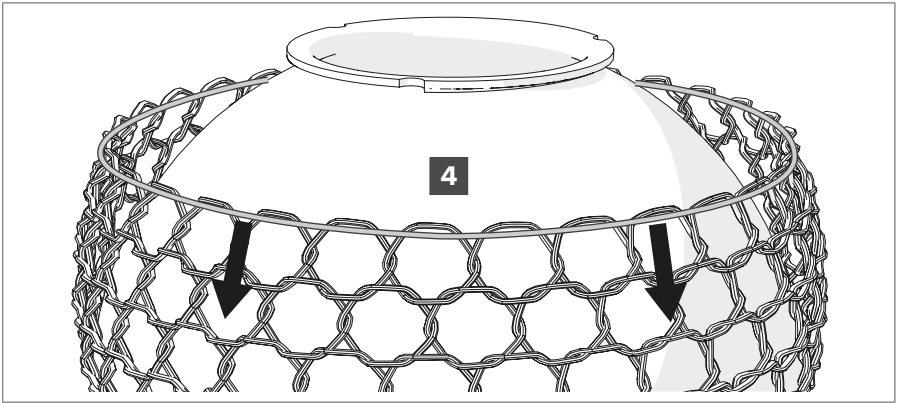


4. Pull the cover off the sphere.
5. Wash at 40°C (104°F) with a pH-neutral washing agent.
- ⚠ Do not tumble dry the cover.
6. Use a clean, microfibre cloth, lukewarm/warm water and a pH-neutral washing agent to clean the sphere.

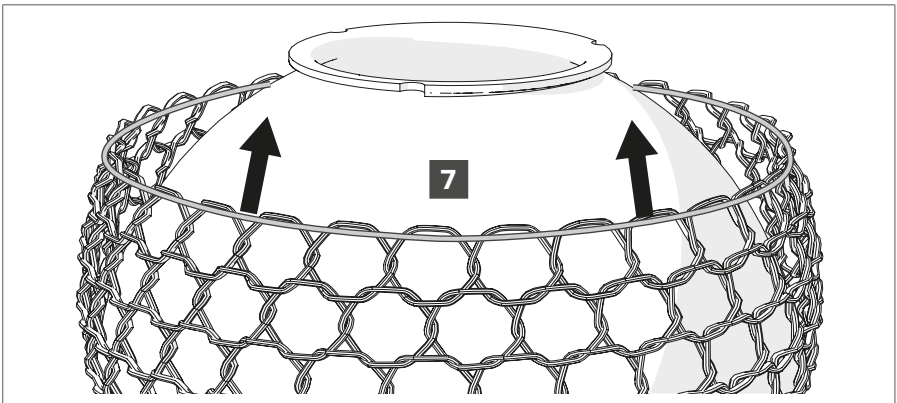


7. Pull the cover back over the sphere.

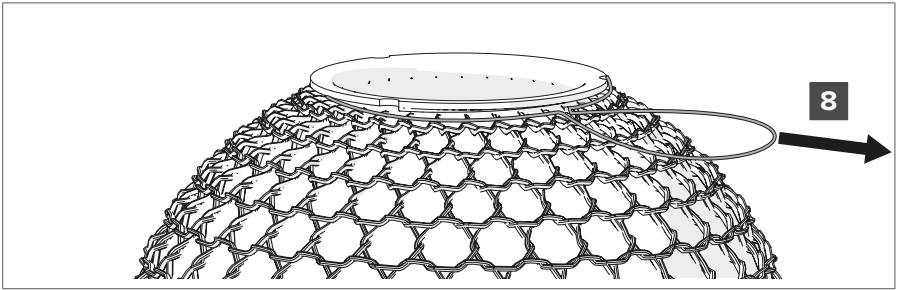

8. Tighten the elastic band to create a loop.

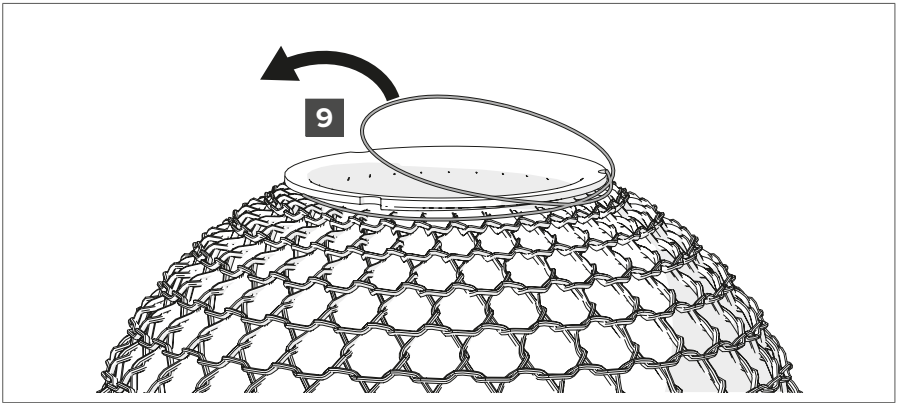

9. Twist and pull the loop over the rim of the sphere.

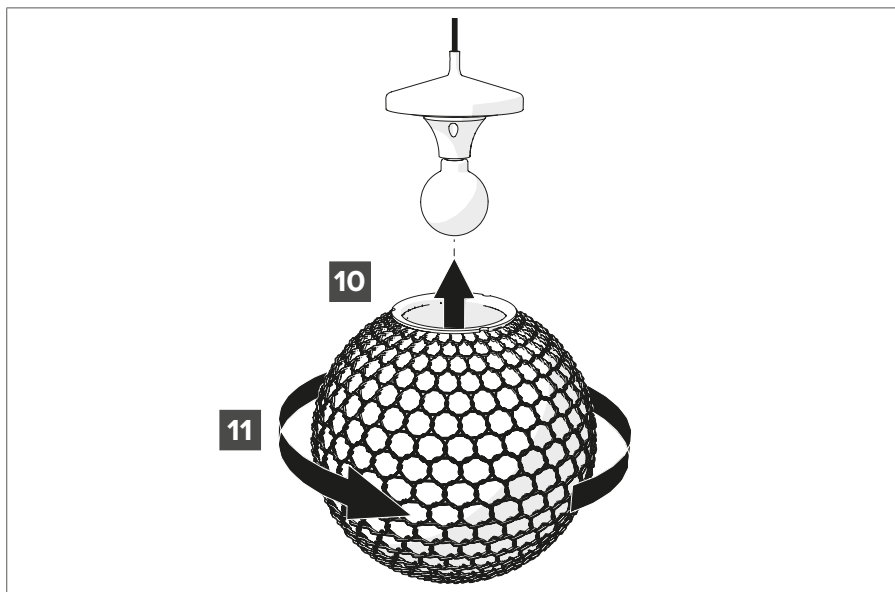

10. Place the sphere in the bayonet catch.
11. Turn the sphere counterclockwise until it is secure.
12. Switch on the power and test whether the lamp is functioning properly.

## NOTES

---





Produced by:

TRIBÙ

Oude Heidestraat 72

3740 Bilzen

Belgium

[www.tribu.com](http://www.tribu.com)